

DESCRIPTION

IQ361ML Addressable I/O module can be used with a loop-type fire alarm control panel. Powered by a non-polar by using 2-bus, its designed with low power consumption, no need for external 24V supply. The IQ361ML should be installed on the DZ-9057 base.


FEATURES

- LPCB & CPR approval;
- Built-in standalone CPU, quick calculating speed;
- Non-polarity two-wire bus to make wiring easy and no need for external 24V supply;
- Connect conventional detector, manual call point or fire hydrant button, and deliver the alarm signal to the controller.




SPECIFICATION

Operating voltage	Single Loop 24V (20V~28V)
Standby Current	Loop <1.2mA;
Action Current	Loop <4mA;
Output Capacity	2A@DC30V
Input Mode Setting	Set by coder F900E
Programming Method	Electronically addressed
Code Range	One address within 1~324
Indicators	Inspection indicator: 1 blink once about 12 seconds in the inspection status or remain lit in the output status; Input indicator: remain lit in the alarm or feedback status;
Operating temperature	-10°C~+55°C
Relative Humidity	≤95%, non-condensing
Material of Enclosure	ABS
Dimension (L x W x H)	86mm x 86mm x 41mm (with base)
Mounting Hole Distance	60.5mm
Weight	About 132g (with base)
Type of the Base	DZ-9058

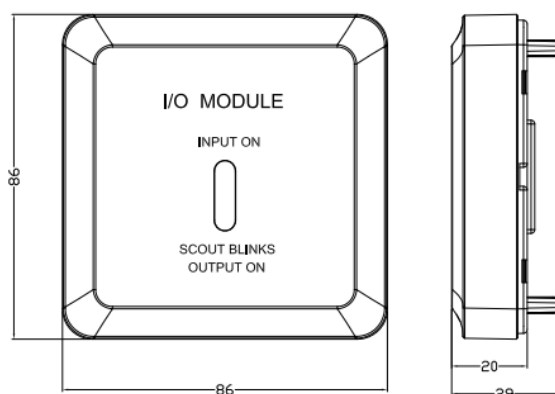

Main body unit: mm



Base