


FEATURES

CO alarms are UL approved stand-alone CO detectors powered from 5-year long-life internal batteries.

The FG731 CO alarms include a wide range of standard features to suit many applications.

- Advanced algorithms provide advanced detection discrimination
- Attractive housing design
- Japan-made highly reliable stable CO sensor, with automatic adjustment
- High immunity against unwanted alarms
- Loud 85 dB internal alarm sounder
- Dual function action button to temporarily silence unwanted alarms (Hush), and to verify alarm operation (Test)
- Separate indicators for Power, Alarm and Service
- Service sounder
- Low power consumption
- Low battery audible indication
- Easy installation. No programming required
- 5-year "end-of-life" timer alerts owner to replace the unit

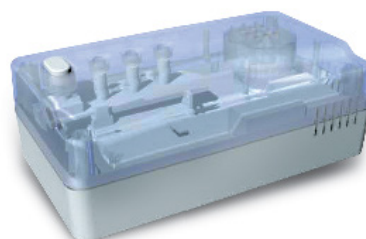

SPECIFICATION SUMMARY

Operating voltage	DC 4.5 V (3 × AA batteries)
Sensing cell	Electro-chemical
Alarm response threshold	70 ppm in (60 ~ 240) min 150 ppm in (10 ~ 50) min 400 ppm in (4 ~ 15) min
Sounder output	≥ 85 dB @ 3 m
Power available indicator	Green
Alarm visual indicator	Red
Service required visual indicator	Yellow
Operating temperature	+4.4 °C ~ +37.8 °C
Operating humidity	15 % ~ 90 % RH, non-condensing
Dimensions (h × w × d)	(64 × 112 × 44) mm