

DESCRIPTION

Fireguard produces various size of ball valves with UL approval These valves are forged brass body for high strength with brass ball with Teflon seat and steel handle with vinyl insulation.


Sizes available from 1/4" to 2" with female x female.

Ball type shut-off valves are for use with sprinkler systems, dry sprinkler systems, standpipe systems and manual deluge control valves.


Size : 1/4", 3/8", 1/2", 3/4", 1", 1 1/4", 1 1/2" & 2"- UL Listed

SPECIFICATION

Approval	FM Approved
Inlet & Outlet	Threaded
Rated Pressure	600 Psi upto 1 1/2" & 300 Psi - 2"
Nominal Size	1/4" to 2"

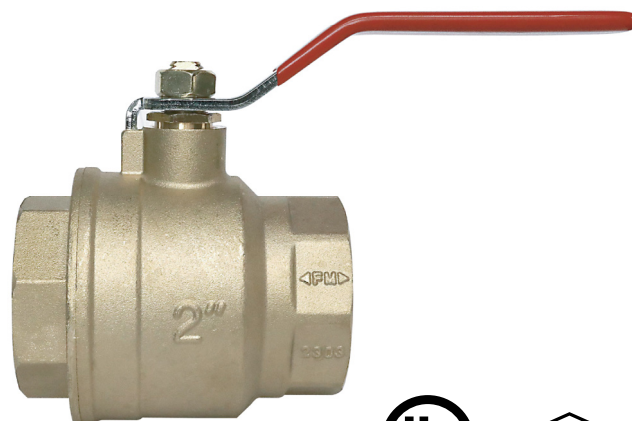

MATERIAL DESCRIPTION

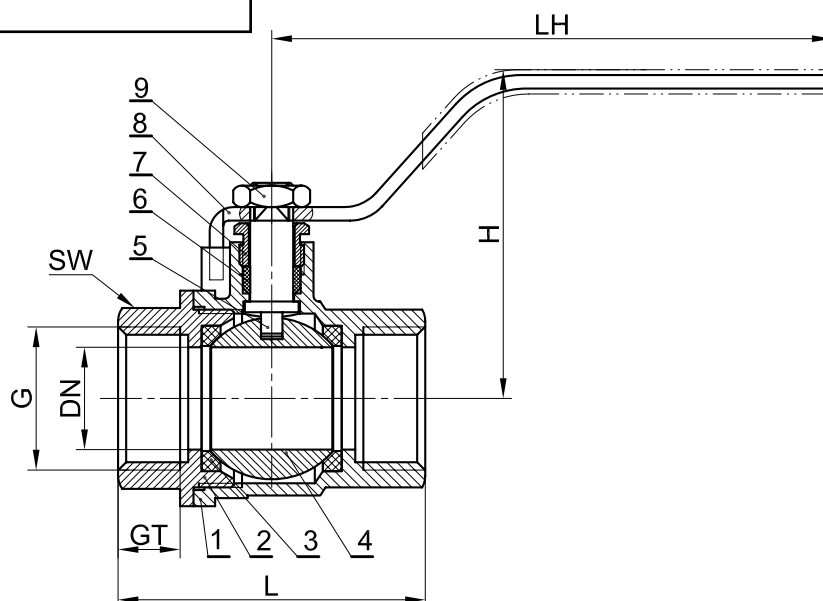

NO.	DESCRIPTION	MATERIAL
1	Body	Brass C37700
2	Bonnet	Brass C37700
3	Seal	PTFE
4	Ball	SS 304
5	Stem	Brass
6	Stem Packing	PTFE
7	Gland screw	Brass
8	Handle	Plated Steel w/vinyl grip
9	Nut	Steel

G	DN	L	H	SW	Gt	LH
1/4-18NPT	Ø10	44	46	20.5	9.5	89
3/8-18NPT	Ø10	44	46	20.5	9.5	89
1/2-14NPT	Ø12.5	54	49	25	12.5	89
3/4-14NPT	Ø17	60	60	31	13	104
1-11.5NPT	Ø23	71.5	63	38	15.5	117.5
1 1/4-11.5NPT	Ø30	82.2	71	47	15.5	117.5
1 1/2-11.5NPT	Ø37	92.5	94.5	53	16	145
2-11.5NPT	Ø47	104.5	101.5	65	16	145
2 1/2-8NPT	Ø64	136	114.5	81	23.5	233
3-8NPT	Ø75	157.5	124	98	25.5	233
4-3/8NPT	Ø95	178	141.5	124	26	233