




FIREGUARD

Gate Valve

Resilient Seated OS&Y Type-Flanged-MJ Ends

FGM909-365

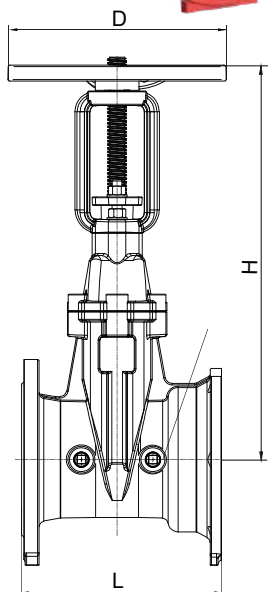

Valve Standard

Conforms to AWWA C515 / BS5163
Fusion bonded coating comply with AWWA C550

Working Pressure

365PSI

Working Temperature

-10°C to 120°C

Connection Ends

ANSI 125/150/EN 1092-2 PN16
ANSI / AWWA C111/A21.11-00

Materials List

Part Name	Material	Specification
Body	Ductile Iron	A536 65-45-12
Wedge Disc	Ductile Iron EPDM Coated	
Disc Nut	Bronze	ASTM B62
Stem	Stainless Steel	AISI 304
Gasket	EPDM	Commercial
Bonnet	Ductile Iron	A536 65-45-12
Thrust Collar	Bronze	ASTM C51100
Gland	Ductile Iron	A536 65-45-12
Wrench Nut	Ductile Iron	A536 65-45-12
Post Plate	Ductile Iron	A536 65-45-12

Dimensions(mm/inch)

Size	mm	80	100	150	200	250	300
	inch	3	4	6	8	10	12
L		222	242	280	305	353	367
H		463	522	715	913	1118	1300
D		220	220	306	370	420	445