




FIREGUARD

Indicator Post Underground Type

FGVI322

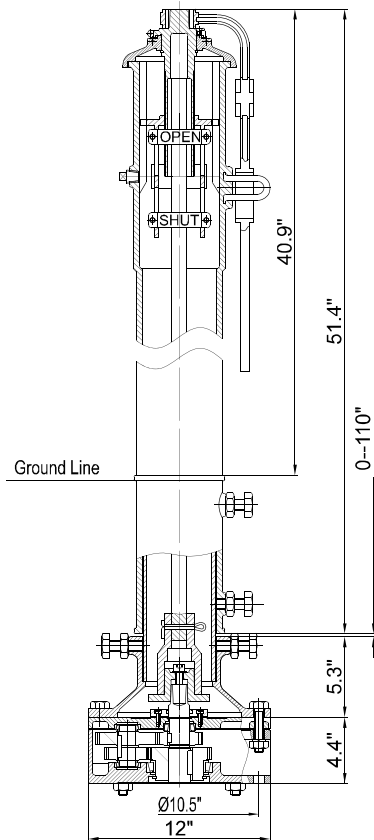

Materials List

Desciption	Material
Locking Wrench	ASTM A536
Operating Nut	AISI 304/ASTM B62
Bolt	ASTM A105
Nut	ASTM A105
Flat Washer	ASTM A105
Shap Ring	AISI 606
Taget Carrier Nut	ASTM B62
Target	ASTM B108
Bolt	ASTM A105
Flat Washer	ASTM A105
Window Gland	ASTM A307B
Window Glass	LEXAN-UN STABILIZE
Gasket	EPDM
Bolt	ASTM A105
Spring Washer	ASTM A105
Nut	ASTM A105
Body	ASTM A536
Bolt	ASTM A105
Nut	ASTM A105
Base Flange	ASTM A536
Bolt	ASTM A105
Nut	ASTM A105
Crane Coupling	ASTM A536
Cotter Pin	AISI 304
Stand Pipe	ASTM A53
Stem 1" Square	AISI 1045
Plug	AISI 304
Top Cover	ASTM A536
Screw	AISI 304
Lock Nose	ASTM A307B
Reducer	PARTS
Bolt	ASTM A105
Nut	ASTM A105
Wrench Nut	ASTM A536
Washer	AISI 304
Hex. Socket Cap Screw	AISI 304
Spring Washer	AISI 304

Valve Standard

Fusion bonded coating comply with AWWA C550

Field Adjustment:

1. Remove the top section from the top of the Indicator Post assembly.
2. Cut the required length off the bottom of the Standpipe for the Ground Line to match up with Standpipe Ground Line mark.
3. Set the "OPEN" and "SHUT" targets for the appropriate valve size.
4. Reattach the Top Section to the top of the Indicator Post assembly.
5. Design and dimensions are subject to change without notice.

***Note: Subject to change without prior notice due to products optimization.