




FIREGUARD

Butterfly Valve Resilient Seated Groove Ends

FGBVG20 (Ductile Iron Body)
FGBVG22 (Bronze Body)

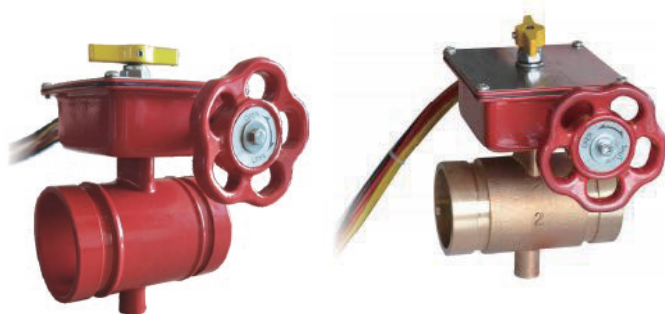

Coating Standard

Fusion bonded coating comply with AWWA C550

Working pressure


175PSI

Working Temperature

- 20°C to 110°C

Flanged Ends

AWWA C606

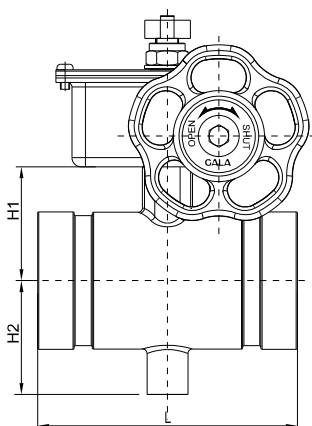

Materials List

Part	Material	Specification
Body (20GG)	Ductile Iron	ASTM A536 65-45-12
Body (22G)	Bronze	ASTM B62 C83600
Disc	Steel+EPDM	ASTM 1045+EPDM
Upper Shaft	Stainless Steel	SS630
Lower Shaft	Stainless Steel	SS630
O-Ring	EPDM	
Gasket	Stainless Steel	AISI 304

Dimensions(mm/inch)

SIZE	mm	inch	50	65
			2	2½
H1	mm		50	55.5
	inch		1.97	2.19
H2	mm		50	55.5
	inch		1.97	2.19
L	mm		114	114
	inch		4.49	4.49

Factory installed UL listed double Tamper
Switches For indoor and Outdoor Use.