


FEATURES

- Ribbed cover with great abrasion resistance, smooth liner for minimum friction loss.
- Resistant to weather, UV, oxidation and most chemicals or petroleum products.
- Flexible to deploy and roll up, compact coil for storage.
- Temperature range from -4°F to 158°F (-20°C to 70°C).
- Maintenance-free and no drying required.
- Applicable to Brass/Alu NST/NPSH threaded couplings, other type on request.
- Standard length 50' , 100' , 200' , up to 660'
- Available with customized color, couplings and marking.




APPLICATION

- Fire Brigades.
- Refineries, Chemical & Petrochemical complexes.
- Airports & Military bases.
- Oil rigs & Power stations - Coal, Oil, Nuclear.
- Building Protection, Harbors & Marine.

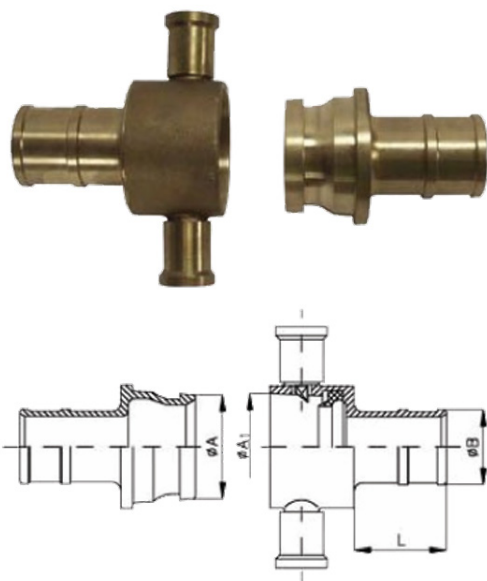

CONSTRUCTION

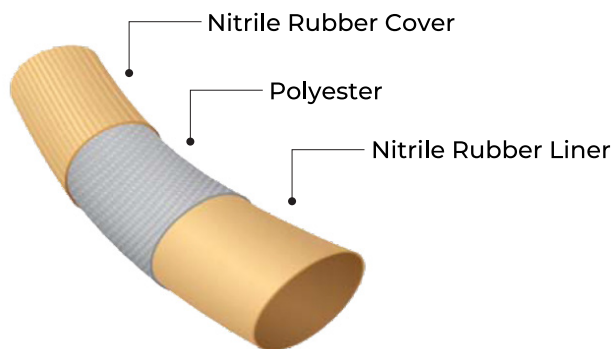

BS336 Coupling in Brass & Aluminium

TECHNICAL DATA

NOMINAL SIZE		WORKING PRESSURE		TEST PRESSURE		BURST PRESSURE		WALL THICKNESS		CERTIFICATION
inch	mm	psi	bar	psi	bar	Lbs./ft.	Kg/m	inch	mm	
1	25	300, 400	21, 28	900, 1200	63, 84	0.18	0.28	0.079	2.4	
1-1/2"	38	250, 300	17, 21	750, 900	51, 63	0.21	0.31	0.085	2.6	
1-3/4"	45	250, 300	17, 21	750, 900	51, 63	0.24	0.36	0.114	2.9	
2"	52	250, 300	17, 21	750, 900	51, 63	0.30	0.45	0.118	3.0	
2-1/2"	65	250, 300	17, 21	750, 900	51, 63	0.39	0.58	0.118	3.0	
3"	75	250, 300	17, 21	750, 900	51, 63	0.58	0.87	0.118	3.0	

