

## DESCRIPTION

Fireguard produces various types firefighting hoses with high quality for most demanding situations. All hoses are manufactured according to national fire protection association (NFPA)1961 latest edition. The Fireguard Model 150,200,250 & 300 synthetic fire hose is widely used by firefighters worldwide. This hose features: tough durable and abrasion resistant, supplied with different couplings. The all-synthetic construction makes rot proof and easy to clean.

## FEATURE

- High Abrasion to resistance
- Light weight
- Maintenance free
- Easy to clean
- Weather resistance
- Nominal Size 1½" & 2½"


## APPLICATION

- Fire Departments and Professional Industry services
- Refineries
- Airports
- Oil rigs
- Building Protection


**\*\*Standard Lengths : 15,22 & 30 m ( 50,75 & 100ft )**

### Construction


Polyester filaments in wrap and in weft direction with smooth EPDM lining for low friction loss

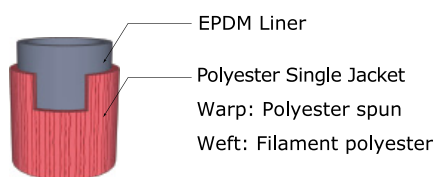

Single Jacket Hose

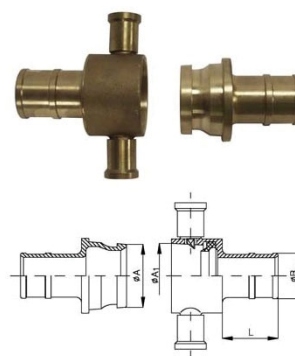

BS336 Coupling in Brass & Aluminum

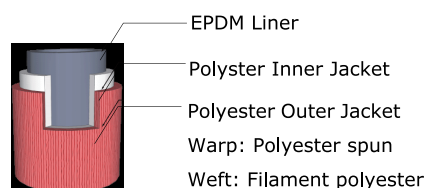

Double Jacket Hose

## TECHNICAL DATA

| MODEL     | TYPE          | SIZE     | TEST PRESSURE-PSI | BURST PRESSURE-PSI | APPROVAL |
|-----------|---------------|----------|-------------------|--------------------|----------|
| FGH150    | SINGLE JACKET | 1½"      | 150               | 450                | UL       |
| FGH200    | SINGLE JACKET | 1½ & 2½" | 200               | 600                | UL       |
| FGH15-250 | SINGLE JACKET | 1½"      | 250               | 500                | UL       |
| FGH25-250 | SINGLE JACKET | 2½"      | 250               | 500                | UL & FM  |
| FGH300    | DOUBLE JACKET | 1½ & 2½" | 300               | 900                | UL       |